

First in Quality. Built to **Last**.

AUTOMATIC BUNDLER PROFESSIONAL SERIES

MODELS

SB35A, SB50A, SB70A, SB80A

BUILT RIGHT...PRICED RIGHT

Proven reliable over and over again, Streamline Solutions' automatic bundler provides you with all the quality features found in much higher priced machines. They are designed and built to give you all the features needed for positive sealing of polyethylene film.

RUGGED DESIGN

Streamline Solutions' automatic bundler's are expertly welded on 1/4" cold rolled steel frames and designed to handle the day to day abuse of even the most demanding bundling applications. Each bundler utilizes two rolls of single wound film mounted on the same side of the machine and an upper and lower power film unwind for ease of use. See for yourself why Streamline Solutions has been a leader in the shrink packaging industry for over 25 years.

STANDARD FEATURES

- Designed to seal polyethylene films
- 35", 50", 70", and 80" wide hot knife seal system
- 22" adjustable product pass through height
- Upper and lower powered film unwind for smooth feed of film
- Film loading from left or right side
- Color PLC touchscreen operation for easy adjustments
- Self tracking conveyor belt and product indexing

RELIABLE AUTOMATIC BUNDLING

Streamline Solutions' automatic bundler's offers the reliability needed to provide a "bull's-eye closure" on trays, individual, or multi-packed products.


STANDARD FEATURES (cont.)

- Flexibility for fully automatic or single product operation
- 4' conveyor length standard
- 78" max film width
- 12" max film OD
- All-welded main frame from 1/4" cold rolled steel
- Bases supplied with locking casters for easy transport
- Leveling legs to provide sturdy base
- Durable custom two-part epoxy finish resists scratching
- 220v standard; Optional 480V
- Made in the USA
- Easy to use design requires minimal training, maintenance, and trouble free operation


OPTIONS

- Additional 4" seal head height
- Additional 2" seal bar length extension
- Optional product guides Interlocked guard doors
- Product hold down
- Single belt option for infeed and exit conveyor
- Extended Infeed or Exit conveyor length
- Left or right angle infeed conveyors available Manual infeed available
- Dual film rack or pull out film rack
- Low film indicator
- Additional E-Stop button
- Optional password protection UL approved electronics and control box
- Left hand machines available
- Custom sizes and configurations available upon request

**Ask Us About Custom Equipment*



1. **Color Touchscreen Panel**
Color PLC touchscreen can be password protected if needed
2. **Control Panel**
Easy to use control panel lets users adjust dwell time and temperature settings for their specific application
3. **Rugged Exit Conveyor**
Exit conveyor transfers the package into a recommended Eastey shrink bundling tunnel to produce a very tight and secure package
4. **Hot Knife**
35", 50", 70" & 80", hot knife seal system ensures a clean, positive, and even seal every time

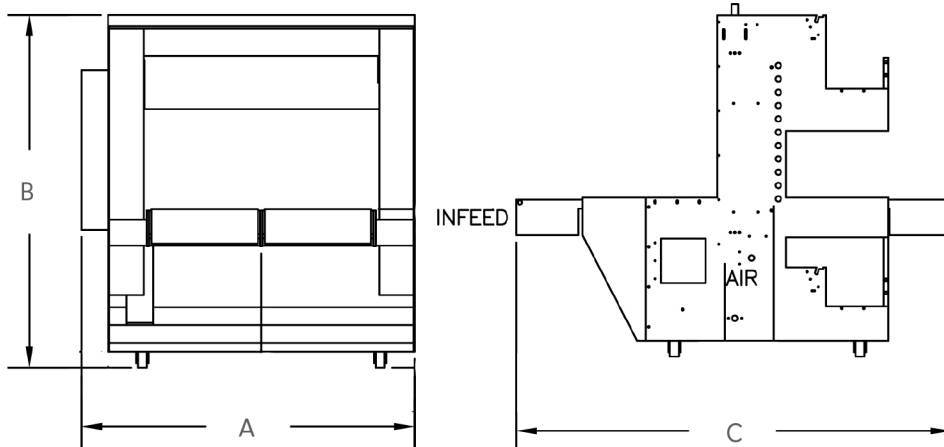

| MODEL NUMBER | MACHINE DIMENSIONS | | | SEAL DIMENSIONS | | CONVEYOR DIMENSIONS | | STANDARD POWER | | | WEIGHT | SHP WT. |
|--------------|--------------------|------------|------------|-----------------|--------|---------------------|--------|----------------|------|-------|----------|----------|
| | WIDTH (A) | HEIGHT (B) | LENGTH (C) | WIDTH | HEIGHT | WIDTH | LENGTH | VOLTS | AMPS | PHASE | | |
| SB35A | 61" | 79" | 98" | 35" | 22" | 37" | 98" | 220 | 10 | 1 | 2300 lbs | 2500 lbs |
| | 154 cm | 200 cm | 248 cm | 88 cm | 55 cm | 93 cm | 248 cm | | | | 1043 kg | 1133 kg |
| SB50A | 76" | 79" | 98" | 50" | 22" | 52" | 98" | 220 | 15 | 1 | 2800 lbs | 3000 lbs |
| | 72 cm | 200 cm | 248 cm | 127 cm | 55 cm | 132 cm | 248 cm | | | | 1270 kg | 1360 kg |
| SB70A | 96" | 79" | 98" | 70" | 20" | 72" | 98" | 220 | 20 | 1 | 3300 lbs | 3500 lbs |
| | 243 cm | 200 cm | 248 cm | 177 cm | 51 cm | 182 cm | 248 cm | | | | 1496 kg | 1587 kg |
| SB80A | 108.5" | 79" | 98" | 80" | 22" | 78" | 98" | 220 | 30 | 1 | 3700 lbs | 3900 lbs |
| | 276 cm | 200 cm | 248 cm | 203 cm | 55 cm | 198 cm | 248 cm | | | | 1678 kg | 1769 kg |