

 **First** in Quality. Built to **Last**.



# L-SEALERS

## SSA PROFESSIONAL SERIES

### MODELS

SSA2016TK, SSA2028TK, SSA2040TK, SSA2050TK, SSA2070TK, SSA2080TK, SSA20100TK, SSA3040TK, SSA3050TK, SSA3070TK, SSA3080TK, SSA30100TK, SSA4040TK, SSA4050TK, SSA4070TK, SSA4080TK, SSA40100TK, SSA050TK, SSA5070TK, SSA5080TK, SSA50100TK

### DURABILITY THAT CAN'T BE MATCHED

Streamline Solutions' Professional Series SSA L-Sealers provide top of the line features and the most robust L-Sealer design on the market today. Expertly welded from ¼" cold rolled steel, Streamline Solutions Professional SSA L-Sealers will withstand even the most abusive real world sealing applications. As a measure of strength, Streamline Solutions L-Sealers weigh nearly twice as much as competitive models.

### PROVEN RELIABILITY FOR YOUR NEEDS

Streamline Solutions L-Sealers are designed and built to give you all the performance features needed for positive sealing a wide variety of films including polyolefin, polyethylene, and PVC. Cast seal arms, pneumatic operation, stainless steel film clamps, and heavy-duty magnet clamping are just some of the features that provide the durability you have come to rely on from Streamline Solutions. See for yourself why Streamline Solutions has been a leader in the shrink packaging industry for over 25 years.


## PNEUMATIC SEMI-AUTOMATIC L-SEALING

Streamline Solutions SSA Professional Series L-Sealers are the ultimate workhorse for your most abusive sealing applications.


### STANDARD FEATURES

- Designed to seal most polyolefin, polyethylene, and PVC\* shrink films
- All-welded main frame from ¼" cold rolled steel
- Built-in drawer for tools or spare parts
- Seal head casting equipped with head return cylinder
- Stainless steel film clamps hold film in place while sealing
- Dual palm pneumatic seal head activation
- Hot knife seal systems available with mushroom (standard), pancake, or arrow inserts
- Dual locking magnet clamps apply even pressure across sealbar
- Adjustable dwell time for better seal control
- Solid state temperature control adjustable for a variety of films
- Adjustable product tray accommodates wide variety of product sizes
- Takeaway conveyor can be raised or lowered to center-seal product
- Automatic takeaway conveyor
- Heavy duty film cradle allows for easy changeovers and adjustments
- Adjustable pin perforator provides air evacuation
- Side seal size from 20" – 50"; front seal size from 16" – 100"
- Maximum film width up to 44"
- Maximum film roll OD up to 12"; 10" with power unwind
- Custom two-part epoxy finish resists scratching
- Heavy duty casters for transportation within plant
- Available in 110v, 220v, or optional 480v
- 60-80 psi air requirement
- Easy to use design requires minimal training and maintenance
- Made in the USA

STANDARD FEATURES

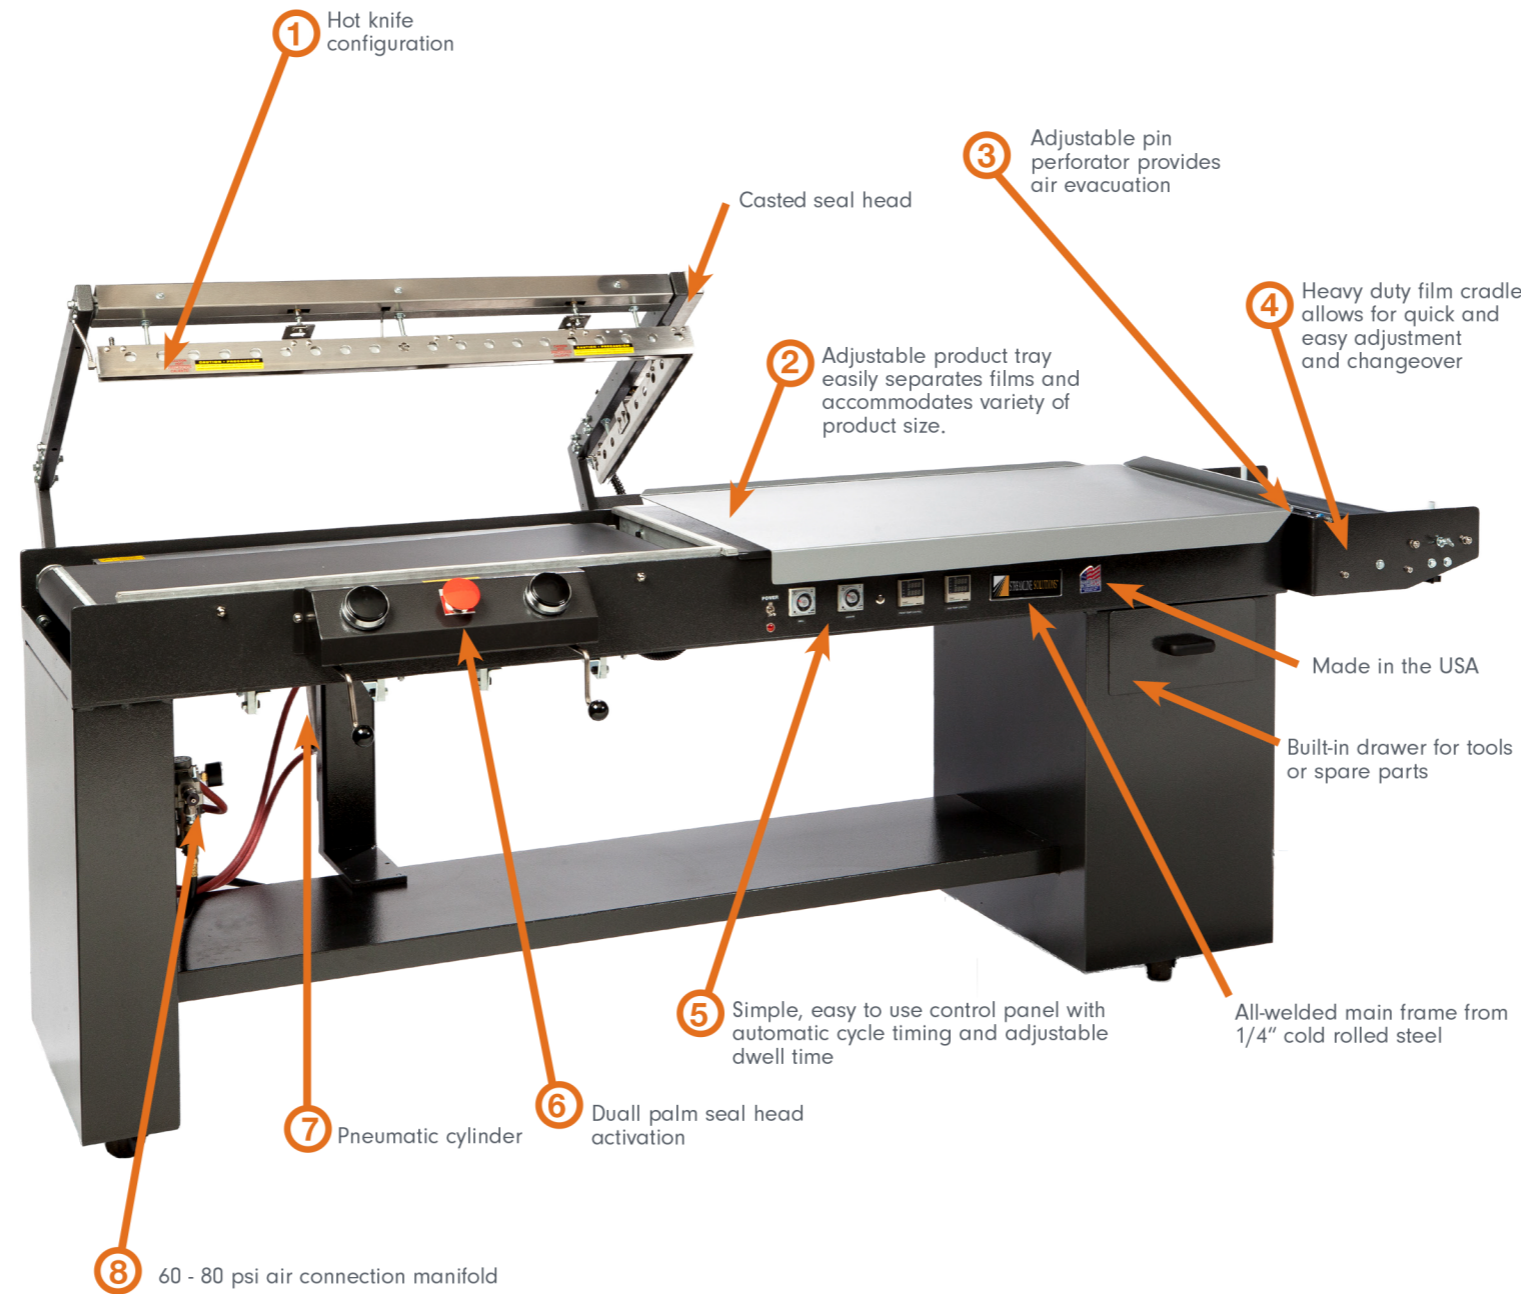

OPTIONAL ACCESSORIES

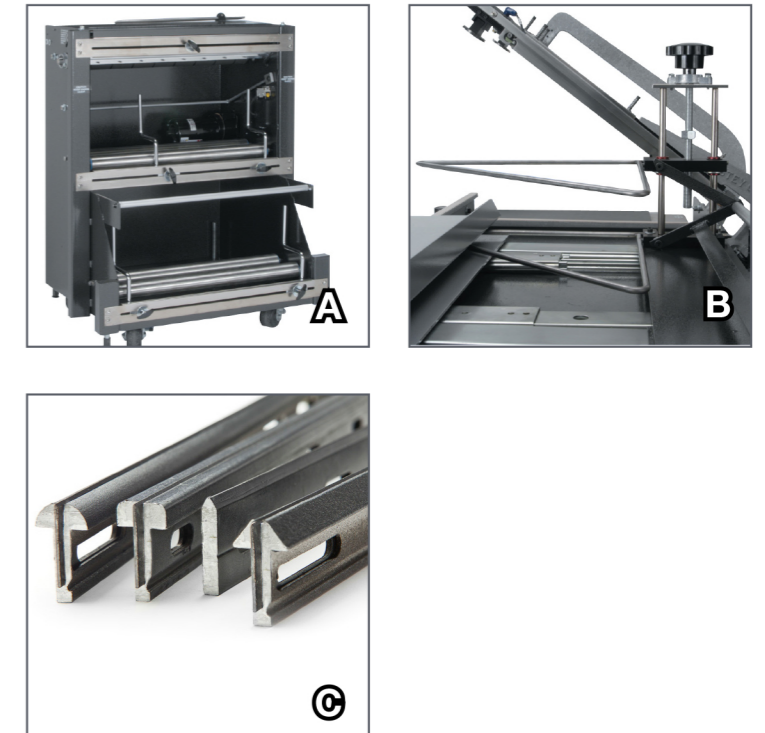

- A **Power film unwind**  
Allows free feeding of film increasing operator efficiency.
- B **Film Inverter**  
Inverting head allows the film to come off the back of machine. This pre-opens the film and minimizes operator effort which in turn increases output.
- C **Hot Knife Inserts**  
Hot knife inserts available in Mushroom, Pancake, or Arrow styles.
- D **Left Hand Models Available**
- E **DuoSeal Continuously Heated Seal Bar**
- F **Lower Conveyor**
- G **Customer Product Guides and/or Product Tray**

**L-SEALERS**  
SSA PROFESSIONAL SERIES

MODEL NUMBER	SEAL DIMENSIONS		MACHINE DIMENSIONS			STANDARD POWER			WEIGHT	SHP WT.
	FRONT	SIDE	WIDTH	HEIGHT	LENGTH	VOLTS	AMPS	PHASE		
SSA2016TK	16"	20"	34"	44"	63"	220/110	10/20	1	600 lbs	700 lbs
	41 cm	51 cm	86 cm	112 cm	160 cm				272 kg	317 kg
SSA2028TK	28"	20"	34"	44"	84"	220/110	10/20	1	700 lbs	800 lbs
	71 cm	51 cm	86 cm	112 cm	213 cm				317 kg	362 kg
SSA2040TK	40"	20"	34"	44"	106"	220	15	1	800 lbs	900 lbs
	102 cm	51 cm	86 cm	112 cm	269 cm				362 kg	408 kg
SSA2050TK	50"	20"	34"	44"	126"	220	20	1	900 lbs	1000 lbs
	127 cm	51 cm	86 cm	112 cm	320 cm				408 kg	453 kg
SSA2070TK	70"	20"	34"	44"	167"	220	25	1	1300 lbs	1400 lbs
	178 cm	51 cm	86.36	112 cm	424 cm				589 kg	635 kg
SSA2080TK	80"	20"	34"	44"	187"	220	20	1	1500 lbs	1600 lbs
	203 cm	50 cm	86 cm	112 cm	474 cm				680 kg	725 kg
SSA20100TK	100"	20"	34"	44"	227"	220	20	1	1900 lbs	2000 lbs
	254 cm	50 cm	86 cm	112 cm	577 cm				861 kg	907 kg
SSA3040TK	40"	30"	43"	44"	106"	220	20	1	1200 lbs	1300 lbs
	101.60	76.20	109 cm	112 cm	269 cm				544 kg	591 kg
SSA3050TK	50"	30"	43"	44"	126"	220	20	1	1300 lbs	1400 lbs
	127 cm	76 cm	109 cm	112 cm	320.04				591 kg	637 kg
SSA3070TK	70"	30"	43"	44"	167"	220	25	1	1600 lbs	1700 lbs
	177 cm	76 cm	109 cm	112 cm	424 cm				728 kg	774 kg
SSA3080TK	80"	30"	43"	44"	187"	220	25	1	1800 lbs	1900 lbs
	203 cm	76 cm	109 cm	112 cm	474 cm				819 kg	861 kg
SSA30100TK	100"	30"	43"	44"	227"	220	25	1	2100 lbs	2200 lbs
	254 cm	76 cm	109 cm	112 cm	577 cm				956 kg	997 kg
SSA4040TK*	40"	40"	53"	44"	106"	220	20	1	1700 lbs	1800 lbs
	101 cm	101 cm	135 cm	112 cm	269 cm				774 kg	819 kg
SSA4050TK*	50"	40"	53"	44"	126"	220	20	1	1900 lbs	2000 lbs
	127 cm	101 cm	135 cm	112 cm	320 cm				861 kg	907 kg
SSA4070TK*	70"	40"	53"	44"	167"	220	25	1	2100 lbs	2200 lbs
	177 cm	101 cm	135 cm	112 cm	424 cm				956 kg	997 kg
SSA4080TK*	80"	40"	53"	44"	187"	220	25	1	2300 lbs	2400 lbs
	203 cm	101 cm	135 cm	112 cm	474 cm				1043 kg	1092 kg
SSA40100TK*	100"	40"	53"	44"	227"	220	25	1	2600 lbs	2700 lbs
	254 cm	101 cm	135 cm	112 cm	577 cm				1179 kg	1229 kg
SSA5050TK*	50"	50"	63"	44"	126"	220	20	1	1900 lbs	2000 lbs
	127 cm	127 cm	160 cm	112 cm	320 cm				861 kg	907 kg
SSA5070TK*	70"	50"	63"	44"	167"	220	25	1	2100 lbs	2200 lbs
	177 cm	127 cm	160 cm	112 cm	424 cm				956 kg	997 kg
SSA5080TK*	80"	50"	63"	44"	187"	220	25	1	2300 lbs	2400 lbs
	203 cm	127 cm	160 cm	112 cm	474 cm				1043 kg	1092 kg
SSA50100TK*	100	50"	63"	44"	227"	220	25	1	2600 lbs	2700 lbs
	254.00	127 cm	160 cm	112 cm	577 cm				1179 kg	1229 kg

All machines require a 60-80 psi air connection \* Powered film unwind included



**STREAMLINE SOLUTIONS™**

P.O. Box 560775, Orlando, FL 32856  
(866)244-7700

info@streamlinesolutionsusa.com  
www.streamlinesolutionsusa.com